


TECHNOLOGY FOR CONTAMINATION CONTROL

REINECK
PERFIL DE CANTOS ARREDONDADOS



REINTECH

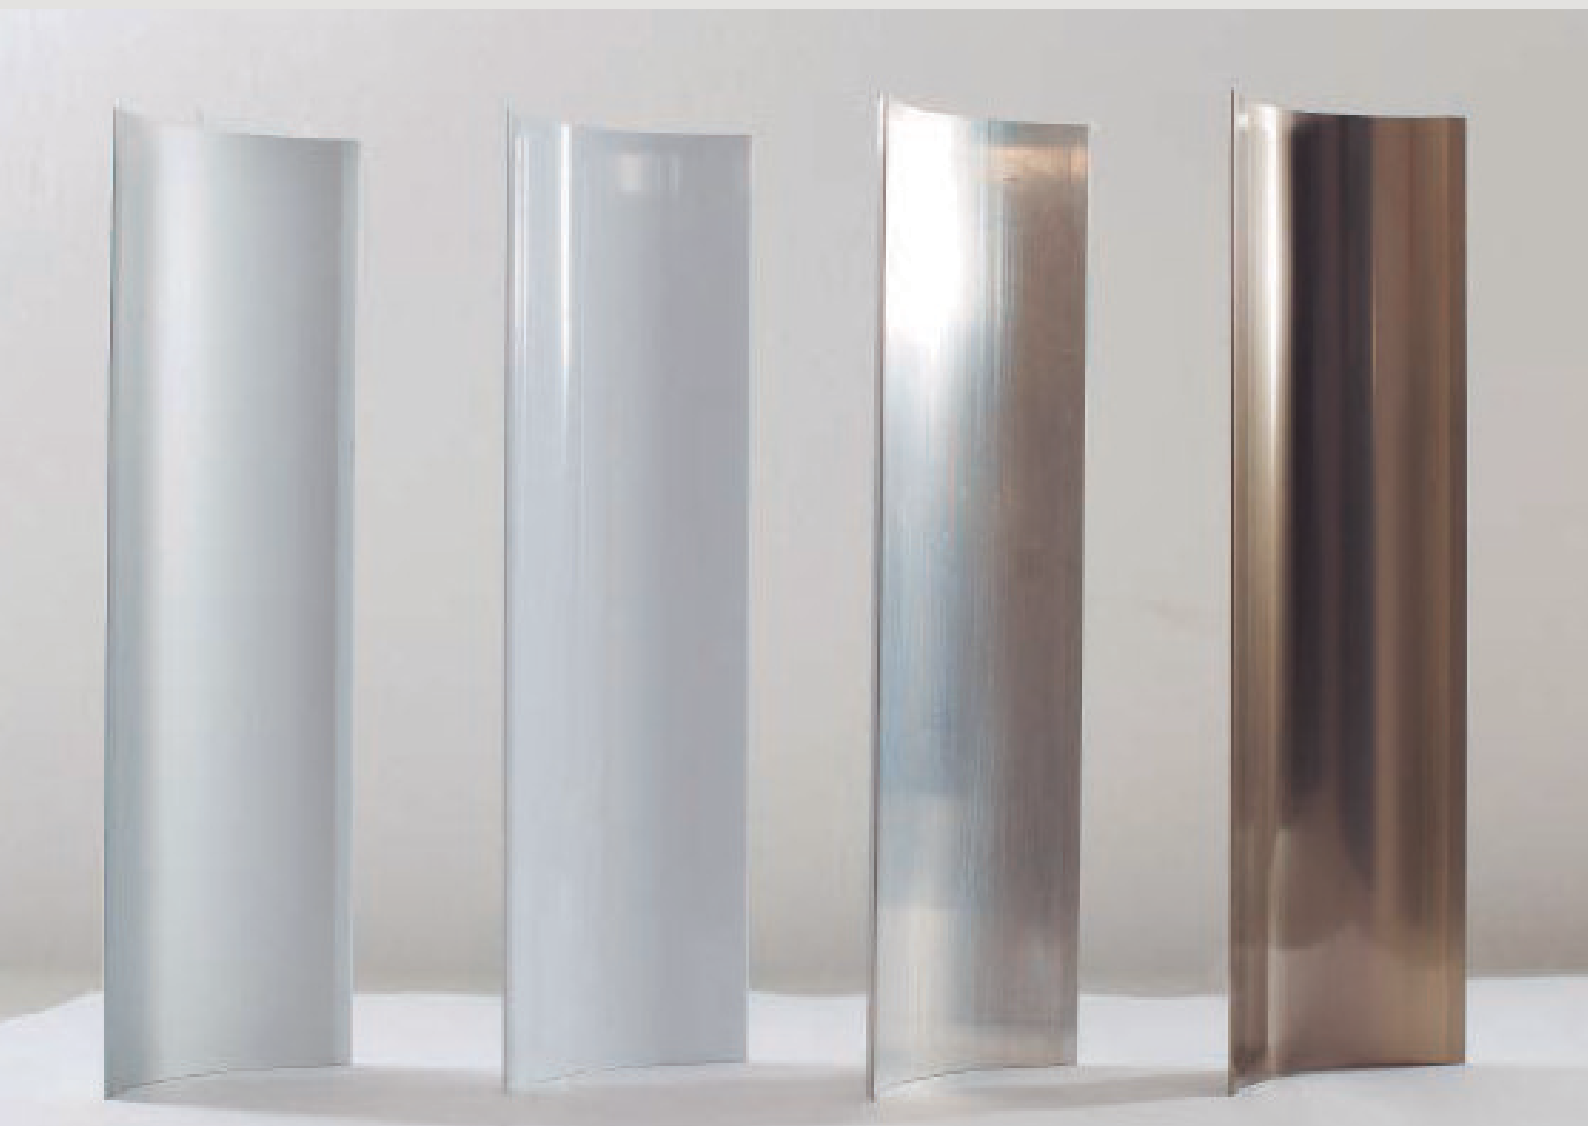

REINECK – ROUNDED CORNERS CONTOUR

The Rounded Corners Contour REINTECH gives perfect fittings to 90° intersections. It's constructive technique integrally respects the concepts defined by the Good Manufacturing Practices – GMP.

STRUCTURE

Aluminium alloy T 6063 Al – REINTECH Matrix
Smooth and cointinuous surfaces

FIXATION

Neutral silicone final structural sealing
Details with polyester spatule

OPTIONAL ITEMS




Bars cut in accord to client requisites
Triple junctions – shell detailment
Door base detailment

REINTECH DIFFERENTIALS

Fast installation
Strong sealing in installation
Saving of silicone in installation
High resistance of decontaminant agents

DETAILMENT OPTIONS

DULL ANODIZING		INOX ANODING		POWDER ANODIZING	
Radius	50 mm	Radius	50 mm	Radius	50 mm
Thickness	1,2 mm	Thickness	1,2 mm	Thickness	1,2 mm
Weight	0,39 kg/m	Weight	0,39 kg/m	Weight	0,39 kg/m
Anodizing	11 µm	Anodizing	22 µm	Anodizing	200 µm

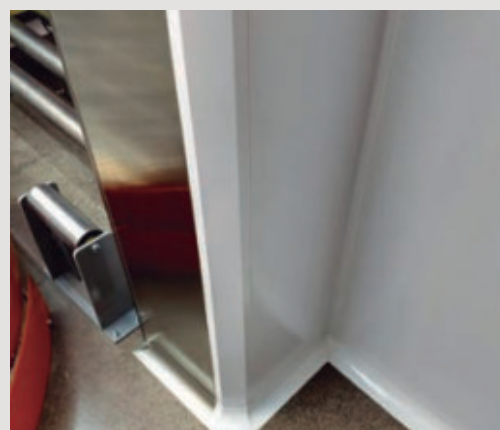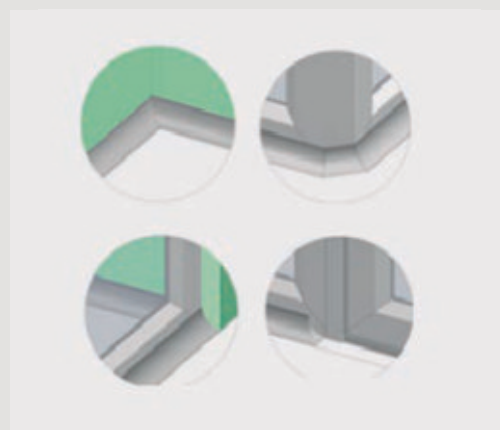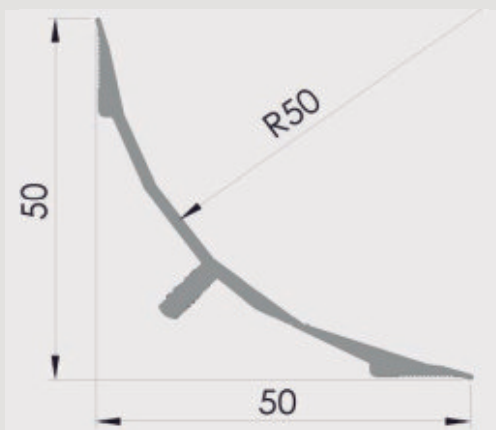

NOTE: CONTACT OUR COMMERCIAL TEAM FOR SPECIAL SOLUTIONS.